



Engineering the Future

k|r|o|f

OIL-FREE ROTARY SCREW COMPRESSORS (AIR COOLED)

With a Kaishan Oil Free rotary,
you have the peace of mind that
only the highest purity of
90 - 160kW

**WORLD CLASS, ENERGY-SAVING
EFFICIENT RELIABLE & SILENT**



24 HOUR
SUPPORT
1300 098 901



KAISHAN COMPRESSORS
www.kaishan.com.au 1300 098 901

WORLD WIDE SUPPORT

Globally recognised industrial presence


Over the last sixty years, Kaishan has steadily grown to become a significant, diversified engineering company developing high value machinery for industries worldwide. With modern, specialized manufacturing facilities positioned in seven strategic locations, Kaishan's group of thirty-two subsidiary companies produce over 90,000

Vertically integrated global strategy

Kaishan's global strategy of combining skilled engineering with highly efficient manufacturing allows us to provide performance proven, reliable equipment at a significant cost savings to our customers. Additionally, Kaishan's manufacturing processes are 85% vertically integrated

rotary screw and 250,000 reciprocating compressors annually. Kaishan is the world's third largest manufacturer of compressed air, mining and drilling equipment and supports industries in more than 60 countries including: USA, Australia, Germany, Japan, Korea, Russia, Africa and throughout Latin America.

ensuring full control of the material supply chain. This vertical approach supplies high quality components at a lower cost, and affords Kaishan the ability to respond rapidly to changing market demands.

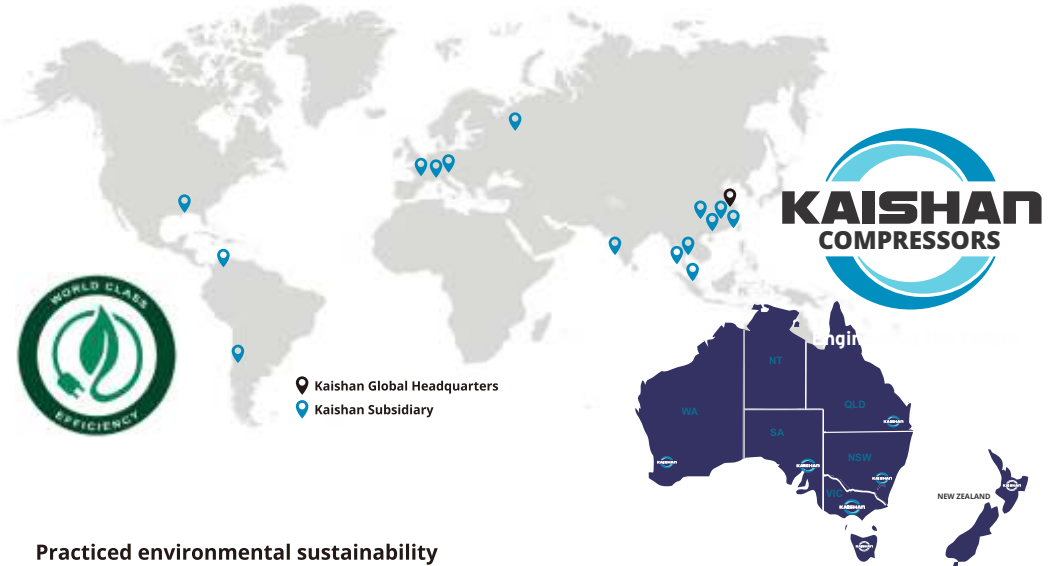

Practiced environmental sustainability

Integral to the design and manufacture of our products is outstanding energy efficiency. Kaishan's fundamental belief in environmental sustainability drives us to produce products that maximise energy efficiency and help to preserve precious energy resources. Single and two-stage compressors that produce more compressed air per unit of power input as well as expanders that utilize waste energy to produce electricity are just two of the fundamental products in our sustainable approach.

Throughout our manufacturing processes, unused waste materials are recycled at every stage to minimise the use of raw materials. This approach translates to lower initial costs and a smaller environmental footprint that helps us all. Kaishan's commitment to environmental responsibility ensures that we will continue to develop technologies and manufacturing solutions that provide industry with machinery of exceptional value - now and well into the future.

KAISHAN AUSTRALIA PTY LTD

24 HOUR AUSTRALIA WIDE SUPPORT

National Sales and Service:

1300 098 901

www.kaishan.com.au



READY TO TAKE EFFICIENCY TO THE NEXT LEVEL?

Oil-free air is used in all kinds of industries where air quality is paramount for the end product and production process. These applications include food and beverage processing, pharmaceutical manufacturing and packaging, chemical and petrochemical processing, semiconductor and electronics manufacturing, the medical sector, automotive paint spraying, textile manufacturing and many more. In these critical environments, contamination by even the smallest quantities of oil can result in costly production downtime and product spoilage.



Food and Beverage



Pharmaceutical




Chemical




Textile



Utilities

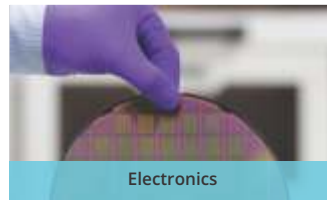

Electronics

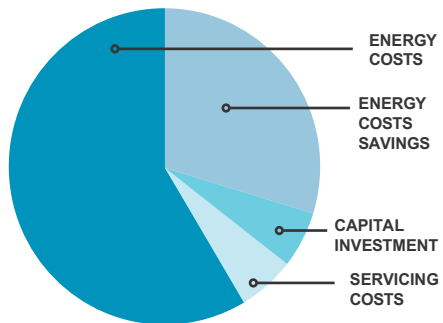

KRSP2 Series VSD Rotary Screw Compressor operating at 70% load compared to a fixed speed model.

TOTAL INTEGRATED SYSTEM CONTROL

KROF controller capabilities include the following:

- Operating parameters
- Maintenance schedules
- Warning stop alarms
- Compressor history

The control panel contains a special programmed microprocessor that can safely and efficiently control all functions of the compressor.

The controller monitors line pressure, oil temperature and working conditions (running, idling and stop). Abnormal conditions will trigger a flashing LED and a message indicating the cause of the alarm.



WHAT IS RIDING ON YOUR AIR QUALITY?

The presence of oil in a compressed air system can lead to product defects, spoilage, and even recalls.



- Zero risk of contamination.
- Zero risk of damaged or unsafe products.
- Zero risk of losses from operational downtime.
- Zero risk of damaging your company's hard-won professional reputation

50 HZ DATA - TECHNICAL DATA

MODEL	POWER kW	FLOW (CFM / M3/min)				SOUND dBA	WEIGHT		DIMENSIONS (LxWxH)		Connection Size										
		105 psi	8 bar	150 psi	10 bar		lbs	ks	in	mm											
KROF-22	22	In Development																			
KROF-30	30																				
KROF-37	37																				
KROF-45	45																				
KROF-55	55																				
KROF-75	75	In Development																			
KROF-90	90											569	16.11	523	14.81	84	9860	472	136x76x26	3452x1930x2260	DN 80
KROF-110	110											690	19.54	641	18.14	84	9940	4509	136x76x26	3452x1930x2260	DN 80
KROF-132	132											822	23.28	759	21.5	84	10105	4584	136x76x26	3452x1930x2260	DN 80
KROF-160	160											954	27.01	911	25.79	84	10220	4636	136x76x26	3452x1930x2260	DN 80
KROF-190	190	In Development																			
KROF-225	225																				
KROF-260	260																				
KROF-315	315																				

AIR QUALITY STANDARDS ISO 8573.1

CLASS	Concentration total oil (aerosol, liquid, vapor) mg/m ³
0	As specified by the equipment user or supplier and more stringent than class 1
1	< 0.01
2	< 0.1
3	< 1
4	< 5

KROF SERIES SPECIFICATIONS

MODEL	RATED PRESSURE bar (g) psig	CAPACITY FAD m3/min i/s	INSTALLED MOTOR power frequency	WEIGHT kg	NOISE LEVEL dBA
KROF-90-7	7 102	16.11 269	90kW 50Hz	4470	76+3
KROF-90-8	8 116	14.81 247	90kW 50Hz	4470	76+3
KROF-110-7	7 102	19.54 326	110kW 50Hz	4500	76+3
KROF-110-8	8 116	18.14 302	110kW 50Hz	4500	76+3
KROF-132-7	7 102	23.28 388	132kW 50Hz	4580	76+3
KRPF-132-8	8 116	21.50 358	132kW 50Hz	4580	76+3
KROF-145-7	7 102	24.80 413	145kW 50Hz	4650	76+3
KROF-145-8	8 116	23.20 387	145kW 50Hz	4650	76+3
KROF-160-7	7 102	27.01 450	160kW 50Hz	4650	76+3
KROF-160-8	8 116	25.79 430	160kW 50Hz	4650	76+3

PRECOOLER / INTERCOOLER

- Precooler reduces thermal stress load
- Highly efficient robust 2 stage cooling
- Approach temperatures under 15 degrees



HYDRAULICALLY CONTROLLED INLET VALVE

- Quicker response to system changes
- Lower starting inrush current
- Control independent of operating pressure
- Reliable, robust design



UNIQUE PACKAGE LAYOUT

- Package is split into cold / hot side
- Cooling air efficiently distributed through packaged
- Each aspect of package designed for sound attenuation



INLET FILTER / DUCTING

- High flow / low pressure drop
- Clean fresh air
- Noise reduction
- Minimise restriction

COOLING FANS


- Aerospace grade Polycarbonate
- Dynamically balanced
- Extremely Efficient
- Modular designed integrated motor
- High static pressure capability

CONTROLS

- Critical operating parameters monitored and controlled for safe operation
- Networking capable of 16 machines
- Multi-lingual capabilities
- Rugged and robust – UV protected
- Alarms and maintenance reminders

SERVICABILITY

- Minimal service parts
- Minimal service time
- All PMs parts on same corner
- Spin on oil filter

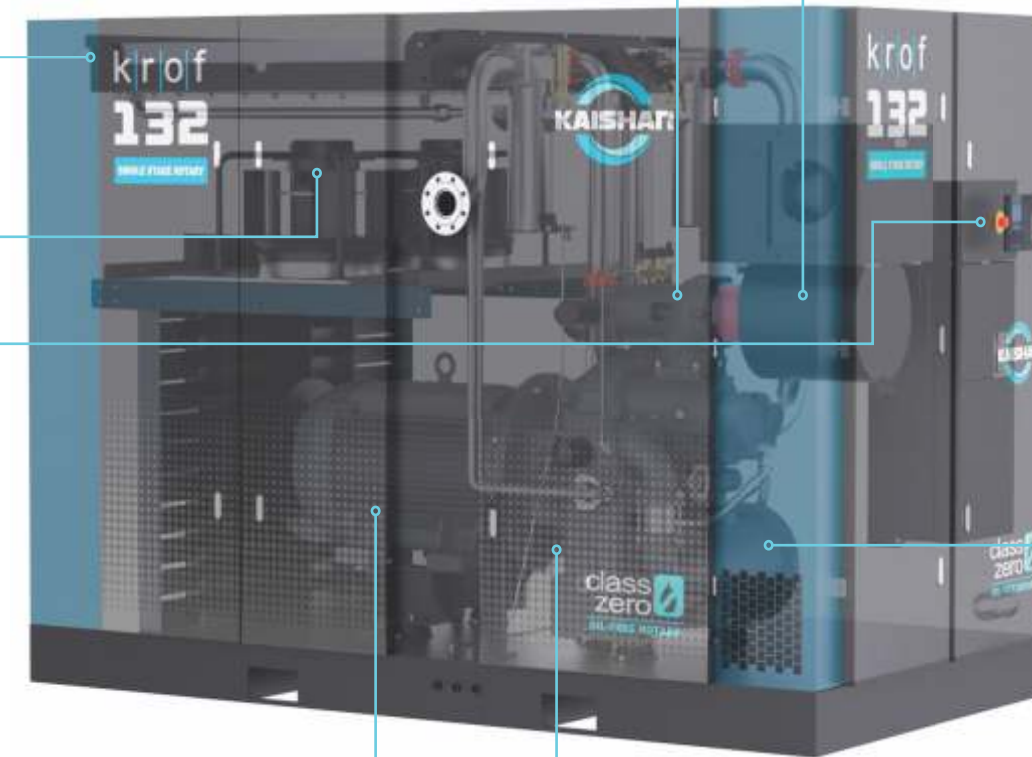

MOTOR

- IEC TEFC IE3 Premium Efficiency – IP55 protects against dust, chemicals and humidity
- Flexible Direct coupled
- Integral motor adapter for guaranteed alignment
- MEPS 2 compliant

OIL FREE AIREND

- Integrated oil distribution lines
- Integrated motor adapter
- Proprietary rotor profile
- PTFE coating on compression elements
- Seal design ensures zero oil in compressed air

- Pressure versatility
- Design life for expected for 5+ years (vs 2 years in the industry)
- Integrated oil pump



INTEGRATED PULSATION DAMPENERS

- Industry leading dBA
- Reduces pressure spikes
- Laminar flow

